


LUGO W

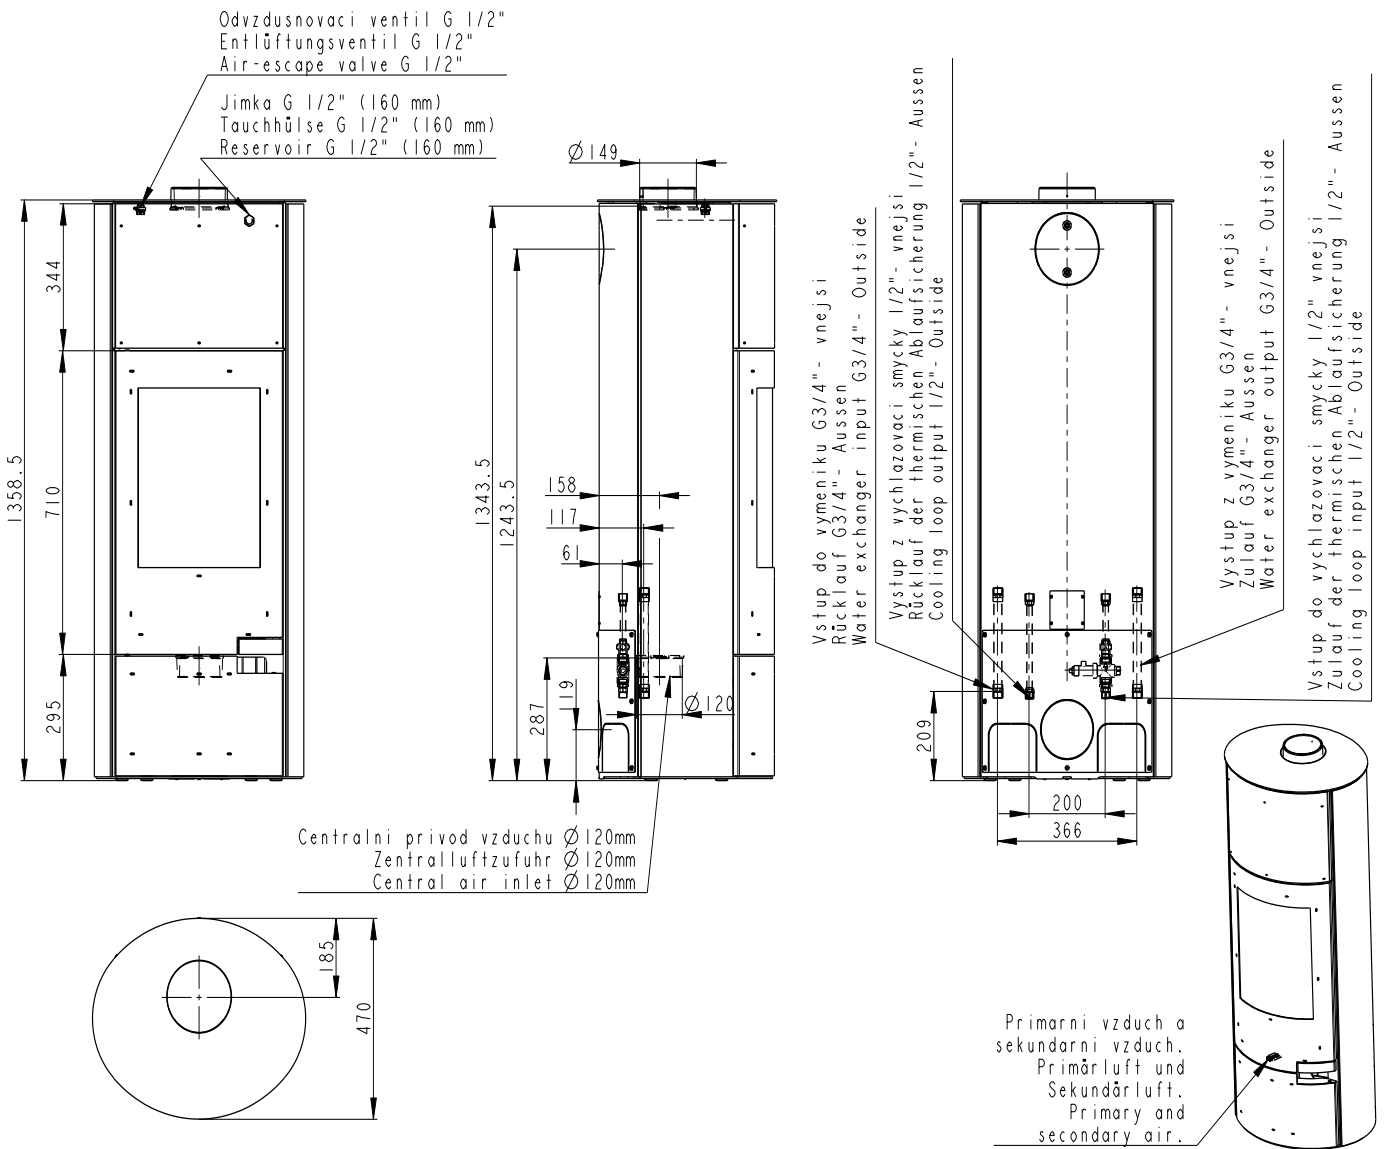

Artikl	LUGO W		
--------	--------	--	--

General data

Nominal heat output	kW	8	10
Water heat output	kW	5	6,5
Efficiency	%	88	87,6
Mass of the test fuel fired hourly	kg/h	2,12	2,69
Dry flue gases mass flow	g/s	7	8,2
Mean flue gas temperature	°C	171	192
Flue draught	Pa	12	
Weight	kg	299	
CO ₂	%	8,86	9,63
Dust O ₂ =13%	mg/m ³	17	17
CO O ₂ =13%	mg/m ³	1181	805

Recommended values

Reg.output	kW	3,5-9
Max. mass of the test fuel fired hourly	kg/h	3,4
Flue gas connector diameter	mm	150

Meets requirement limit values for

EN 13 240	•
BImSch V 1	•
BImSch V 2	•
DIN plus	•
15a B-VG	-

Supplied accessories

Holder with magnet	•
Hook to open the ashtray	•
Ashtray	•
Chimney brush	•
Automatic ventilation valve	•
Cooling loop	•
Cooling valve	•