
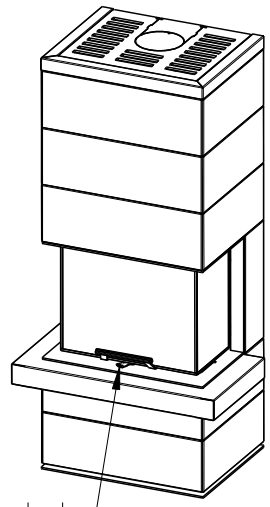
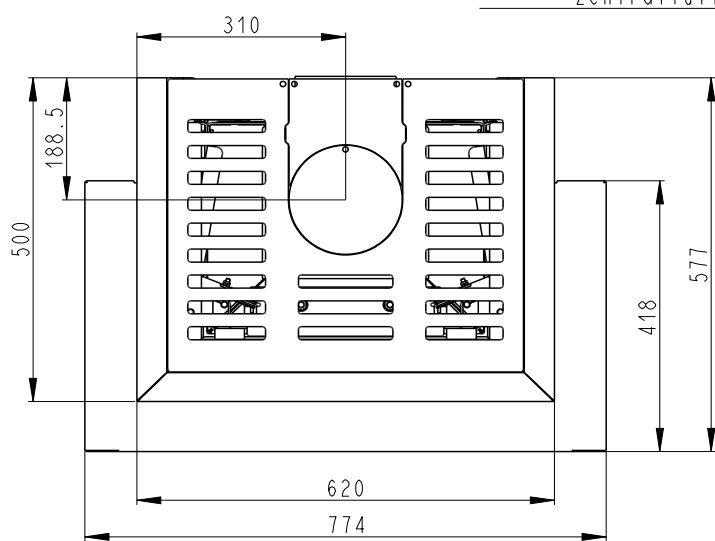


# CARA CS 03

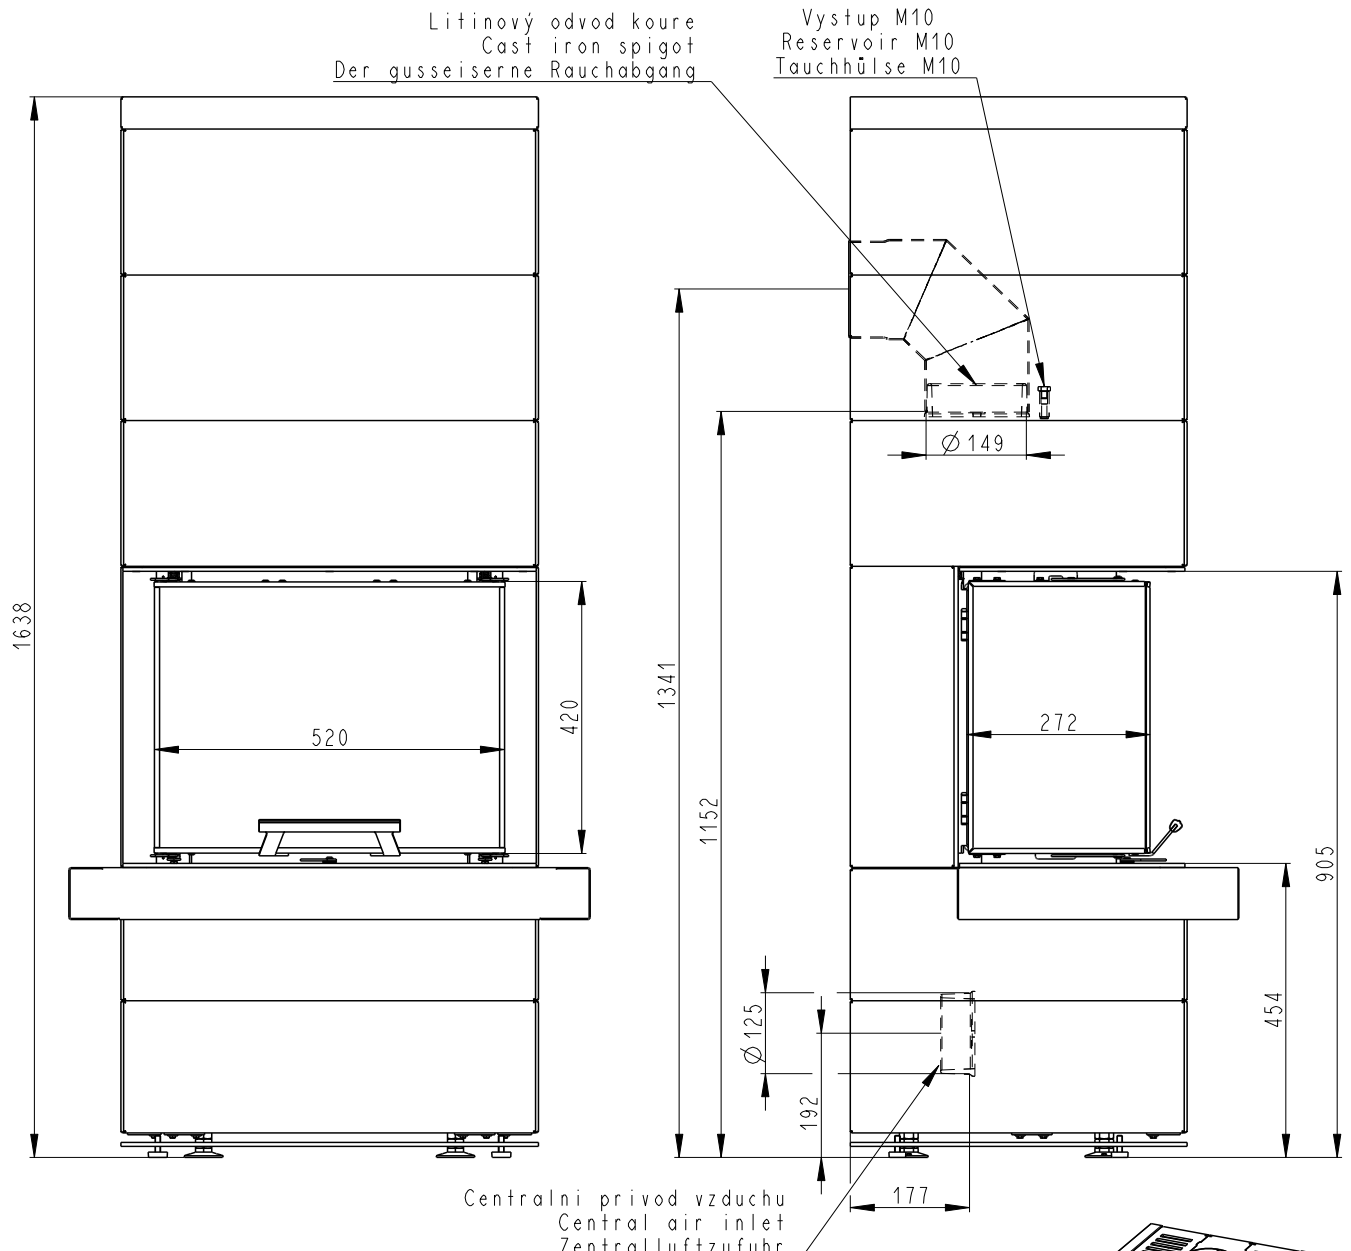

Primarni a sekundarni vzduch  
 Primärluft und Sekundärluft  
 Primary and secondary air

Artikl	CARA CS 03
--------	------------

#### General data

Nominal heat output	kW	5,7
Efficiency	%	82,10
Mass of the test fuel fired hourly	kg/h	1,6
Dry flue gases mass flow	g/s	4,9
Mean flue gas temperature	°C	234
Flue draught	Pa	10
Weight	kg	245
CO <sub>2</sub>	%	9,3
Dust O <sub>2</sub> =13%	mg/m <sup>3</sup>	38
CO O <sub>2</sub> =13%	mg/m <sup>3</sup>	1011

#### Recommended values

Reg.output	kW	2,9-7,4
Max. mass of the test fuel fired hourly	kg/h	2,1
Flue gas connector diameter	mm	150

#### Meets requirement limit values for

EN 13 240	•
BImSch V 1	•
BImSch V 2	•
DIN plus	•
15a B-VG	•

#### Supplied accessories

Holder with magnet	•
Ashtray	-